


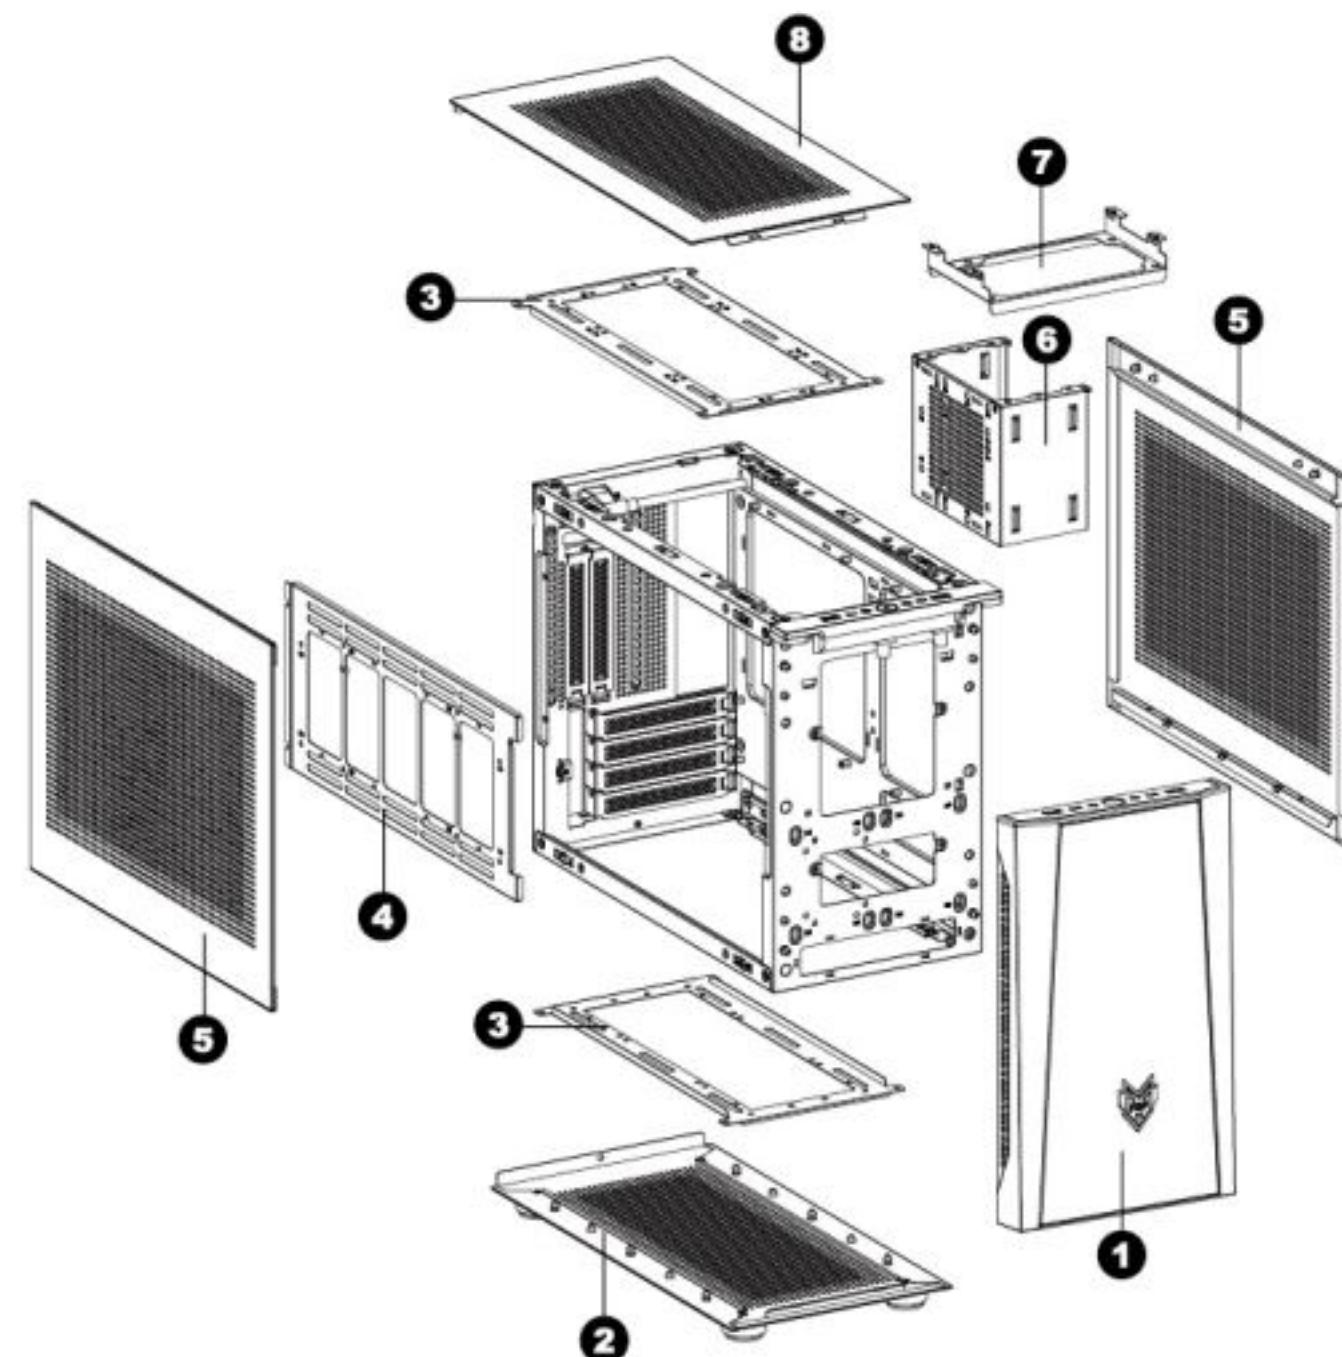


PC CASE CST350 PLUS


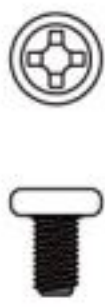

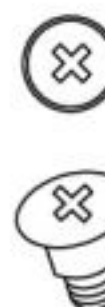


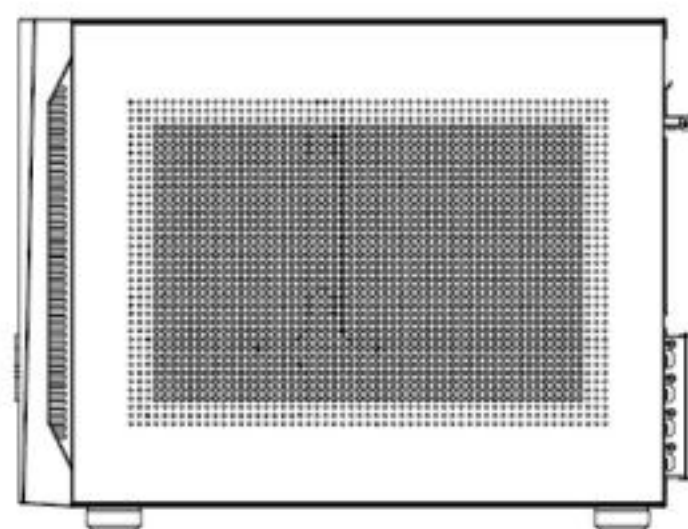

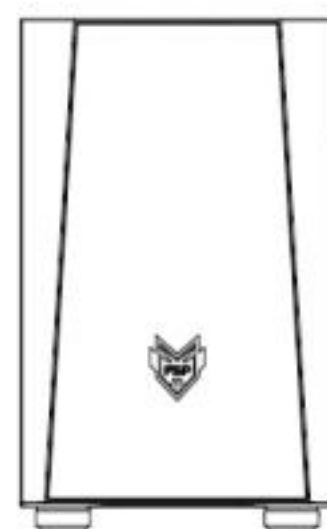

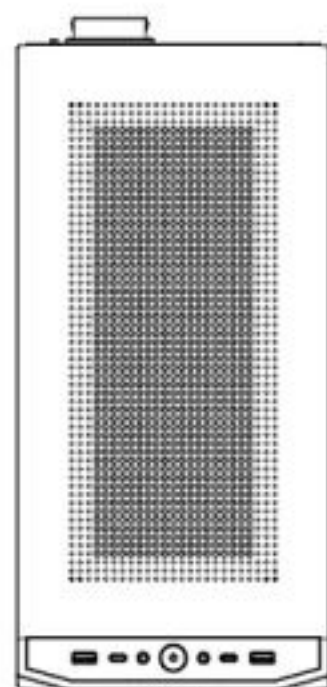

- | | | |
|---------------------------------|-----------------------|----------------------------|
| 1 Front Panel | 2 Bottom Plate | 3 HDD / Fan Bracket |
| 4 Left HDD / Fan Bracket | 5 Side Cover | 6 Micro-PSU Bracket |
| 7 ATX PSU Bracket | 8 Top Cover | |


Specification

Model		CST350 Plus
Type		Micro ATX
Color		Black
Materials		0.8mm SPCC
Weight		NW: 5.2kg
Dimensions (D x W x H)		391x185x303mm
MotherBoard Support		Micro ATX or Mini-ITX
External I/O port		USB3.0 x 2, USB Type-C, HD Audio
Maximum CPU Cooler Height		Vertical VGA: 88mm Without vertical VGA and fan bracket: 155mm
VGA Card Length		Vertical VGA with ATX PSU: 245mm Vertical VGA with SFX PSU: 320mm Horizontal VGA with ATX PSU: 320mm
Expansion Slots		4
Dust Filters		Top/Side/Bottom
Power Supply Type		ATX or SFX-L
Drive Bay	3.5" HDD	3
	2.5" SSD	3
Fan&Water Cooler Support	Top	120mm x 2 ; 120mm x 1 with ATX PSU
	Side	120mm x 2 or 240mm Radiator(ITX+Horizontal VGA)
	Bottom	120mm x 2 or 240mm Radiator(ITX+Vertical VGA)
	Rear	80mm x 1(without Vertical VGA)
Fan & Radiator	Preinstall Fan	Top: 12cmx1; Rear: 8cmx1
Max Radiator Support		240mm(Only ITX motherboard)


Accessory

1  x4 for PSU	2  x8 for 3.5"HDD	3  x16 for MB / 2.5"SSD	4  x4 for 2.5"SSD	5  x4 for 3.5"HDD
6  x4 for HD	7  x8 Cable Management	8  x8 Cable Management	9  x1 for MB	10  x1 Cylinder




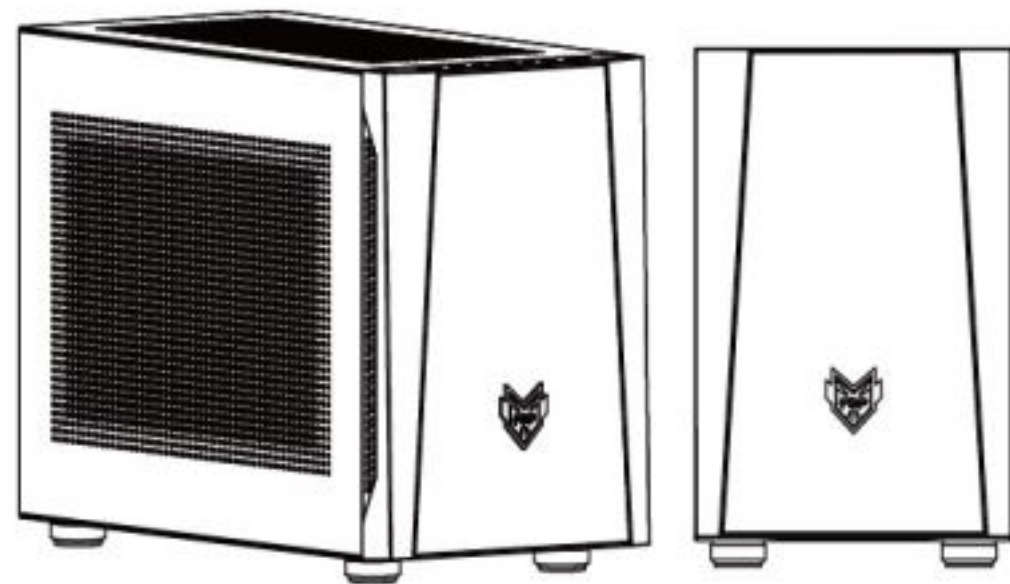


Side Panel Disassembly

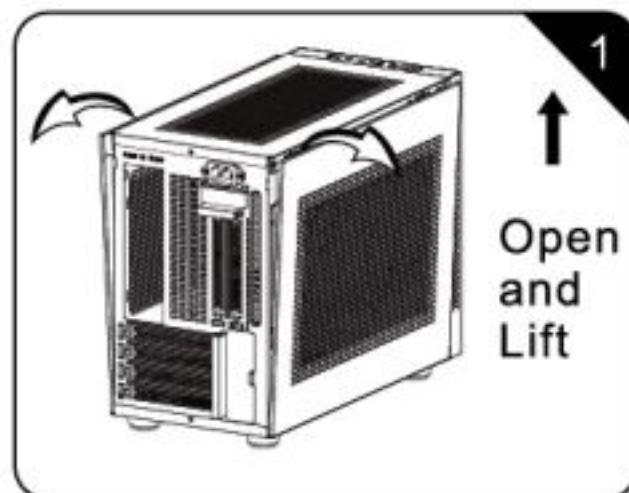


Remove side panels from the back

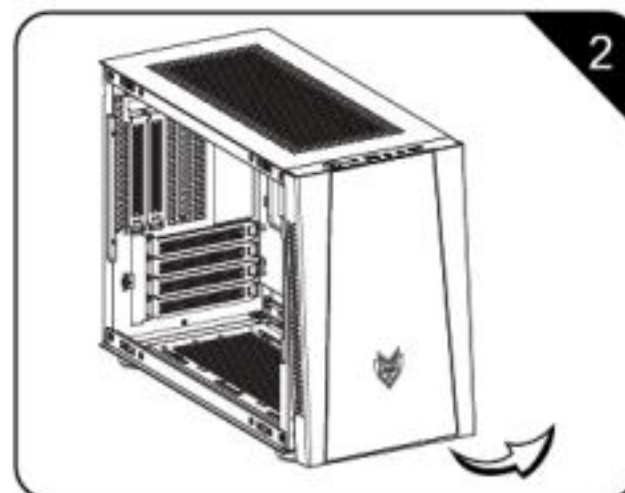

Remove front panel

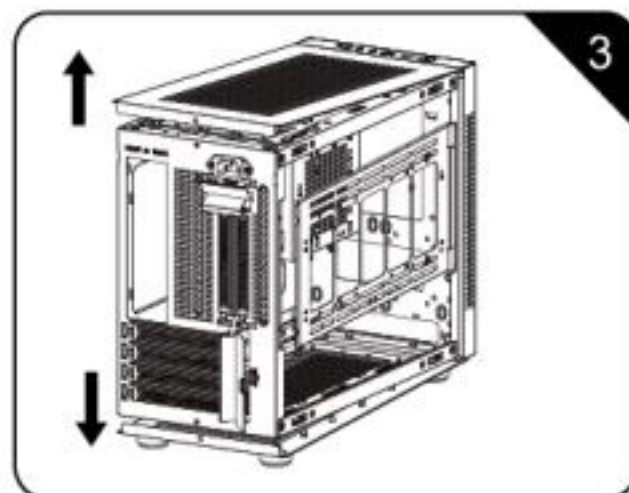


Remove screws on rear plate, then open top and bottom plate

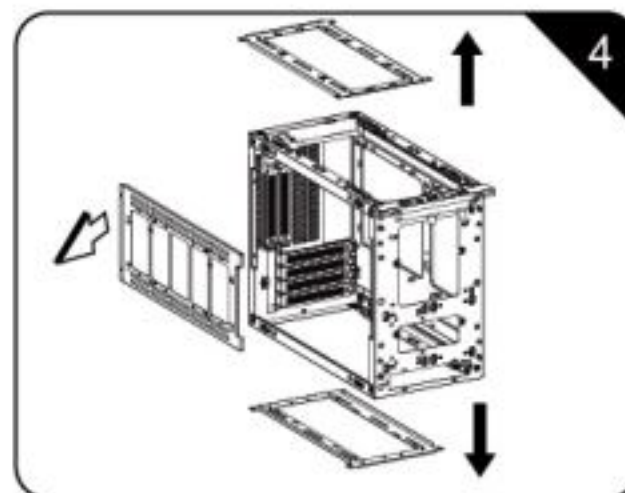


Unscrew to remove HDD/Fan bracket and the side bracket


MATA Installation Plan - MB Installation

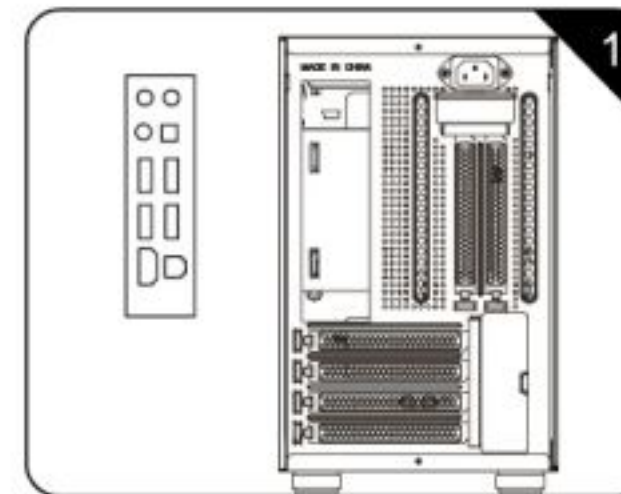


Get the IO slot ready

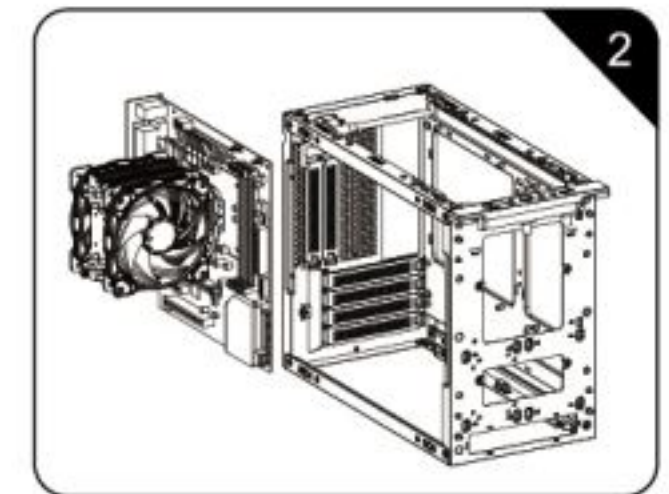

Put in MATX mother board to right location

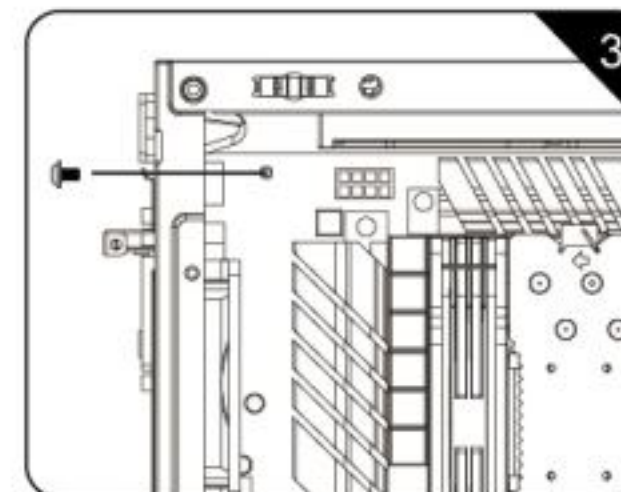


Fix with mother board screws

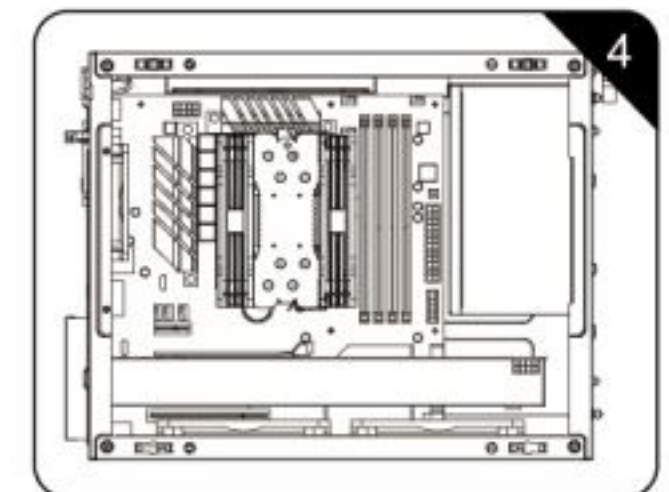


Finish


MATA Installation Plan - ATX PSU Installation

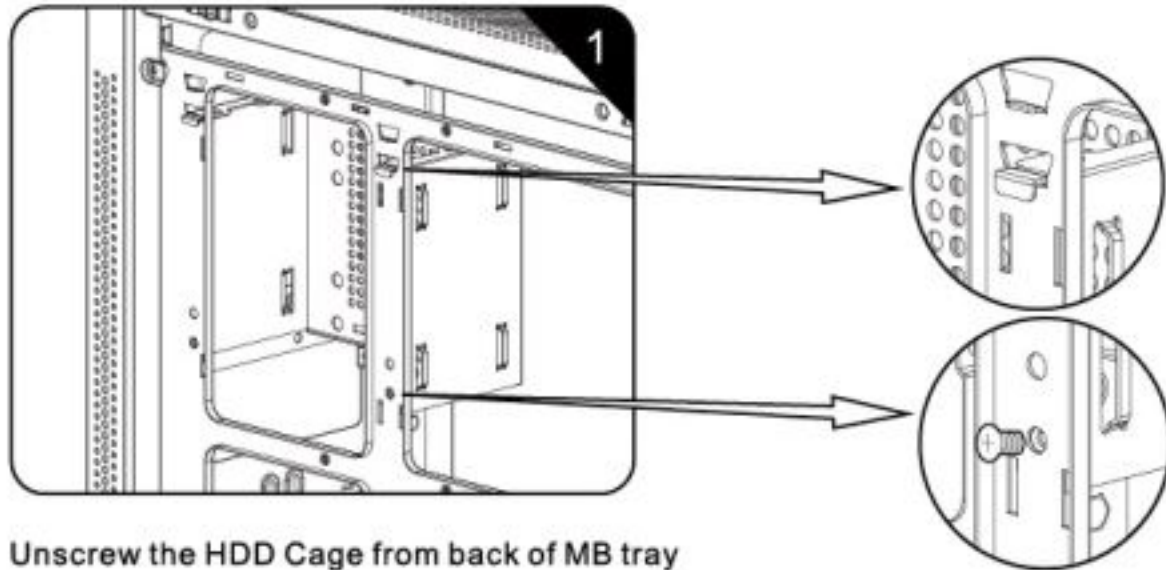

Unscrew the HDD Cage from back of MB tray

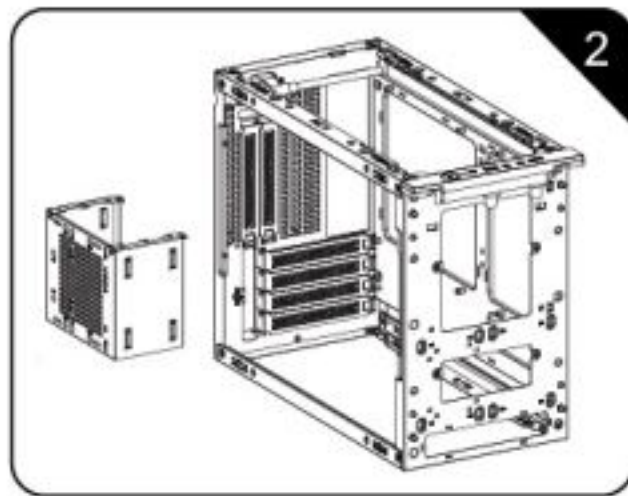


Remove the Micro PSU cage, put ATX PSU into the correct position

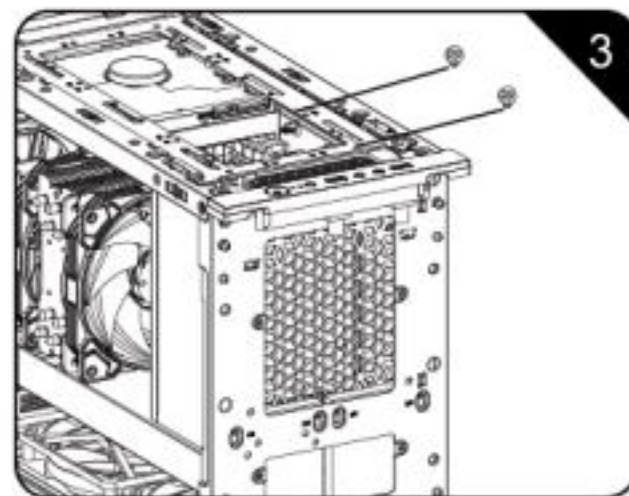


Fix with hex screws from the top


MATA Installation Plan - Installation of SFX PSU

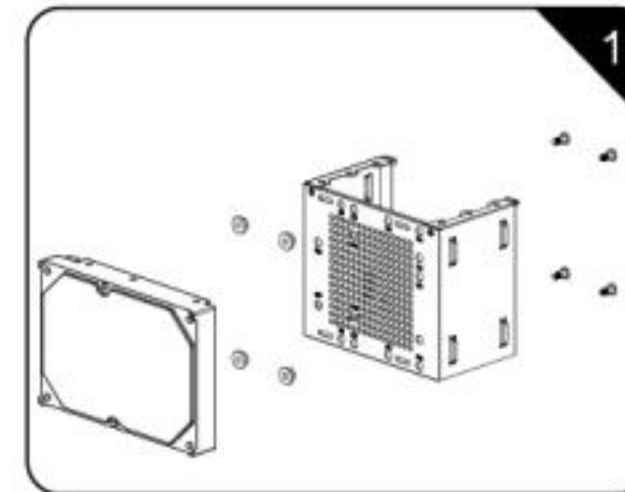

Put in gaskets before fixing
HDD/SDD with step screws
(Fix SSD with 2.5" SSD screws)
(Fix HDD with 3.5" HDD screws)

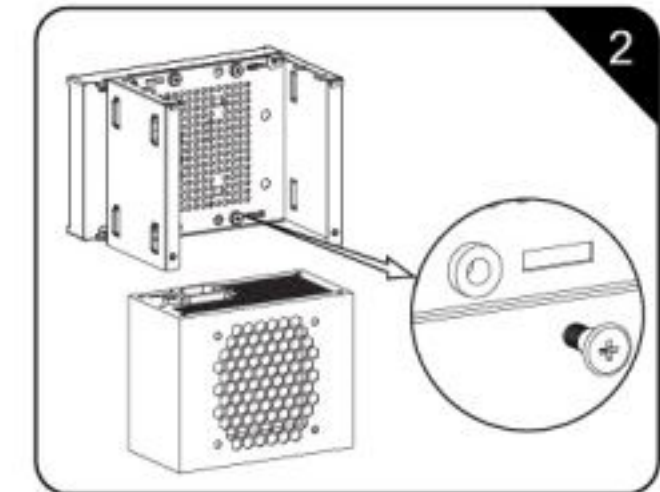


Put in the PSU and fix with hex screws

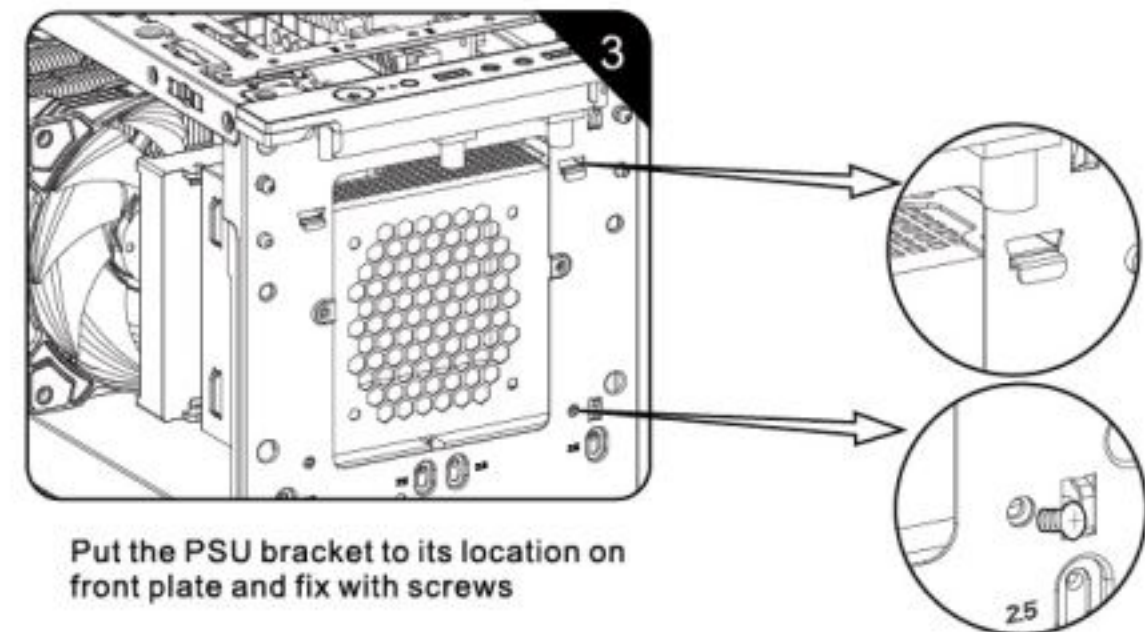


Put the PSU bracket to its location on
front plate and fix with screws


ITX Installation Plan - MB Installation

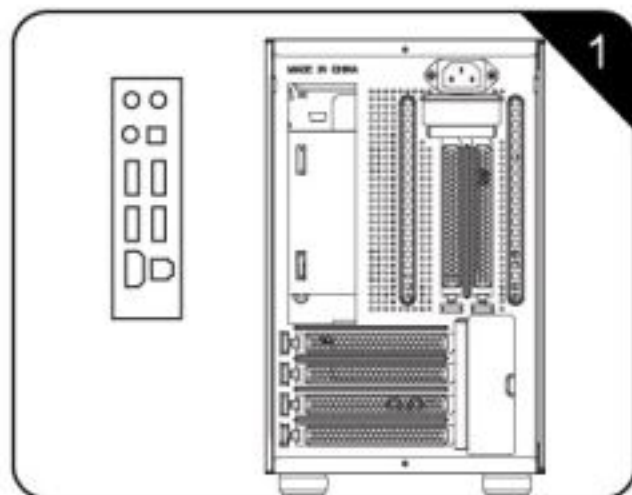

Get the IO slot ready

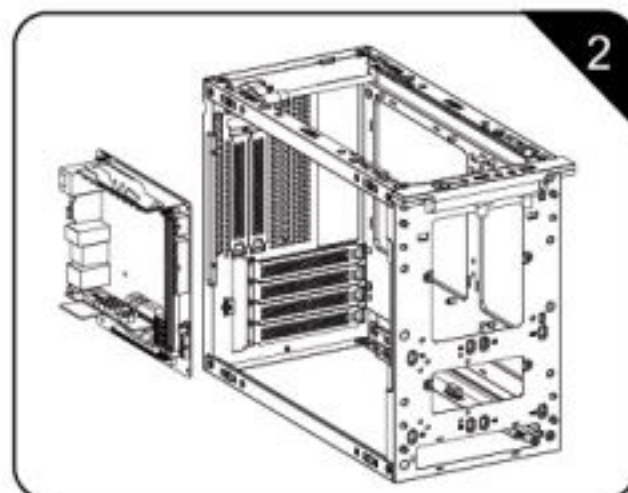


Put in ITX mother board to right location

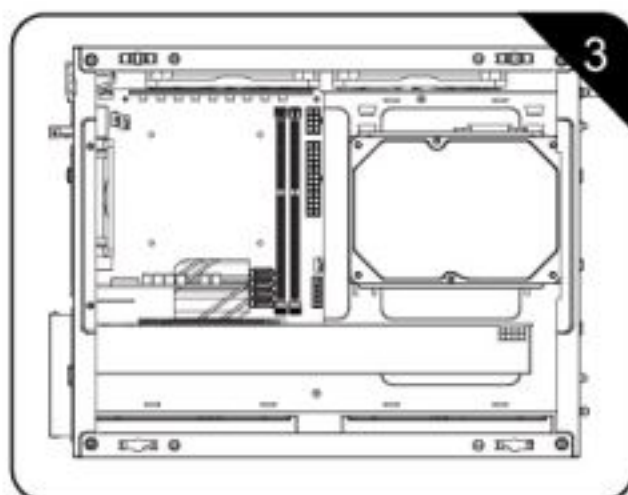


Put in ITX mother board to right location


ITX Mother Board Installation Plan - ATX PSU Installation

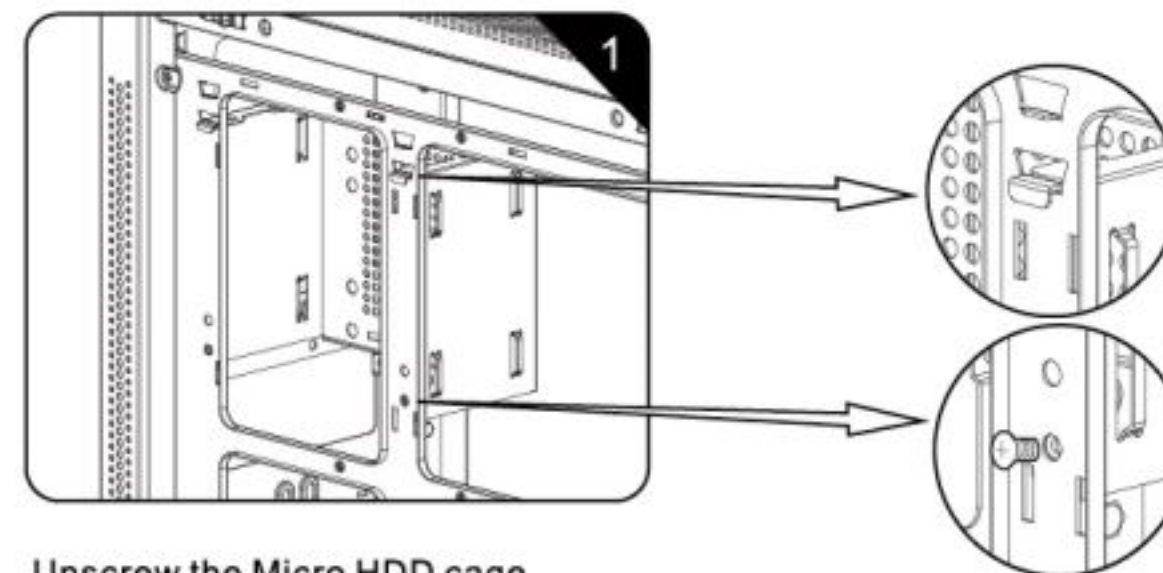

Unscrew the Micro HDD cage from back of MB tray

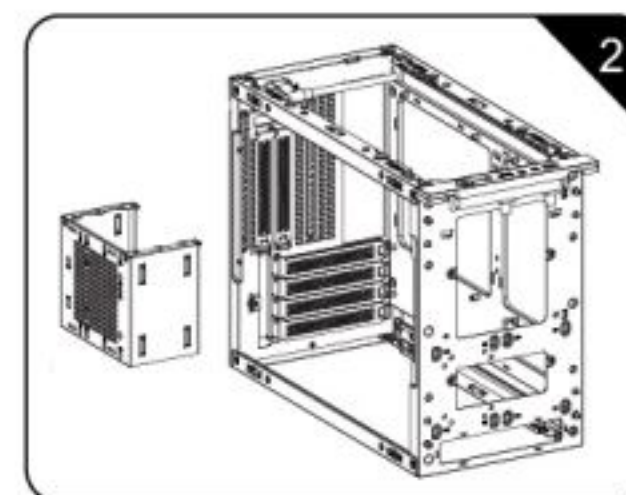


Remove the Micro PSU cage, put ATX PSU into the correct position

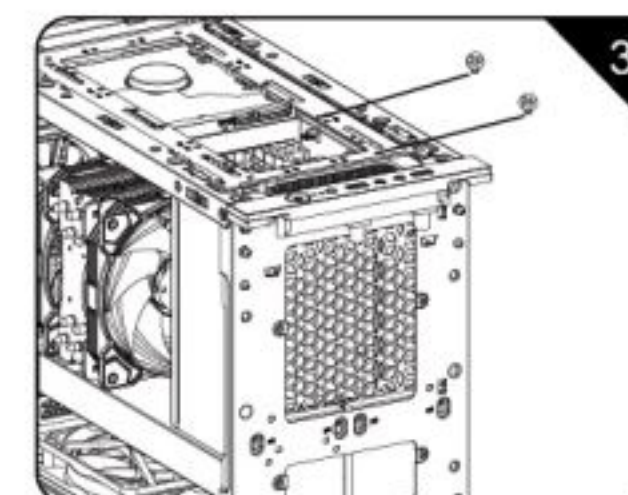


Fix with hex screws from the top


ITX Installation Plan - Installation of Micro PSU①

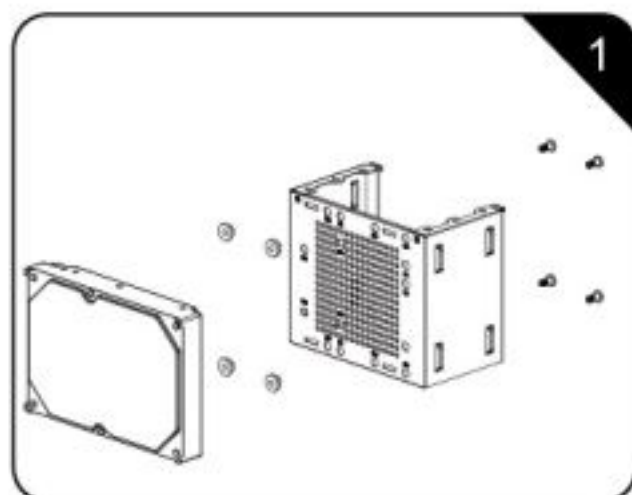

Put in gaskets before fixing
HDD/SSD with step screws
(Fix SSD with 2.5" SSD screws)
(Fix HDD with 3.5" HDD screws)

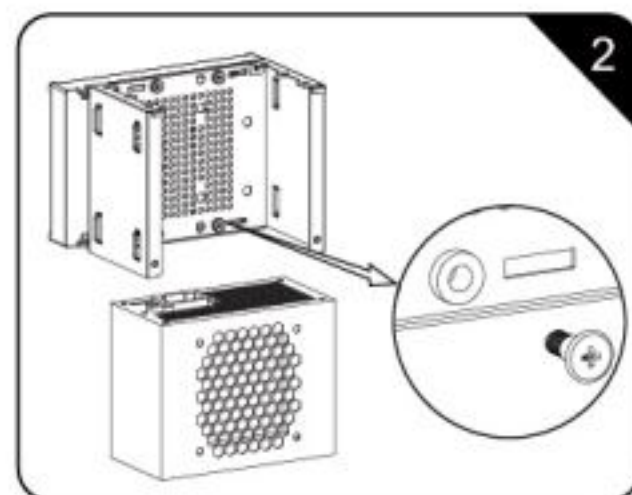


Put in the PSU and fix with hex screws

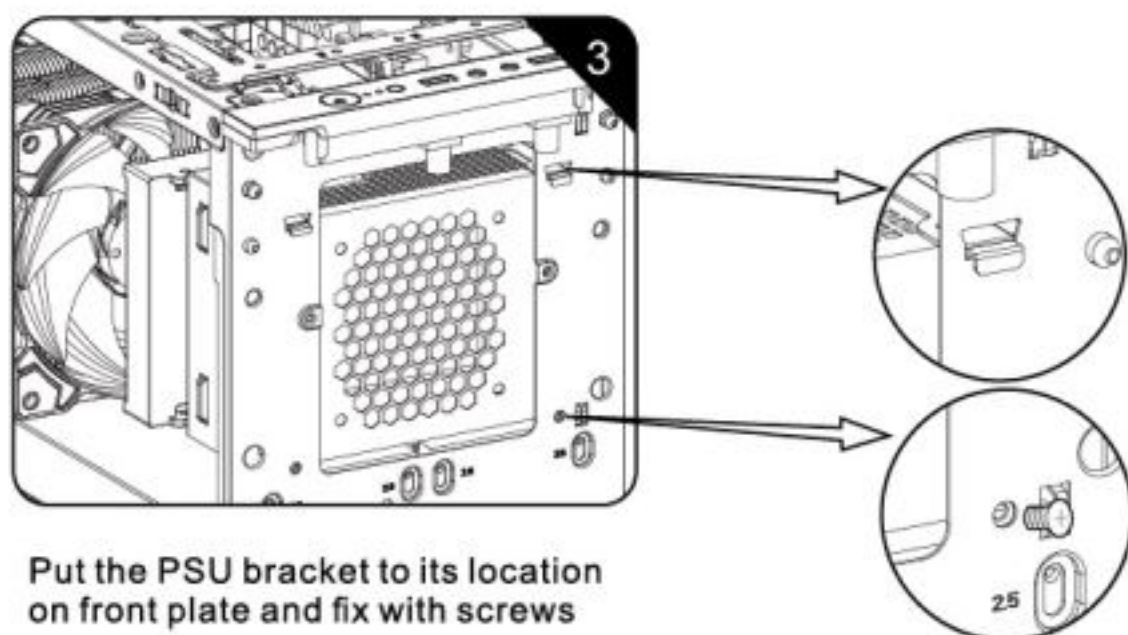


Put the PSU bracket to its location
on front plate and fix with screws

ITX Installation Plan - Installation of Micro PSU②

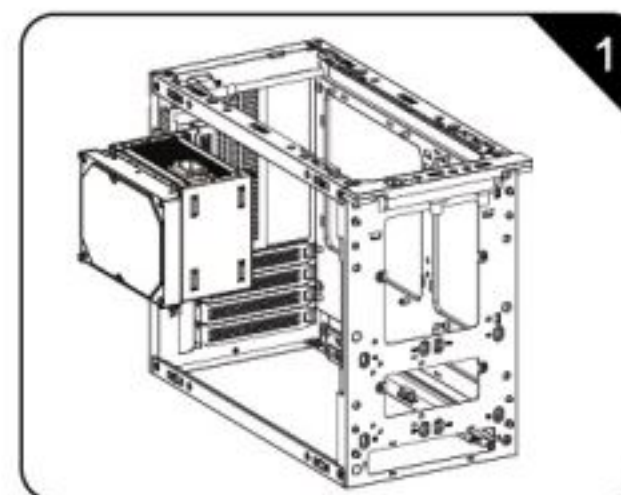


Put the cage with HDD and PSU
back into the chassis

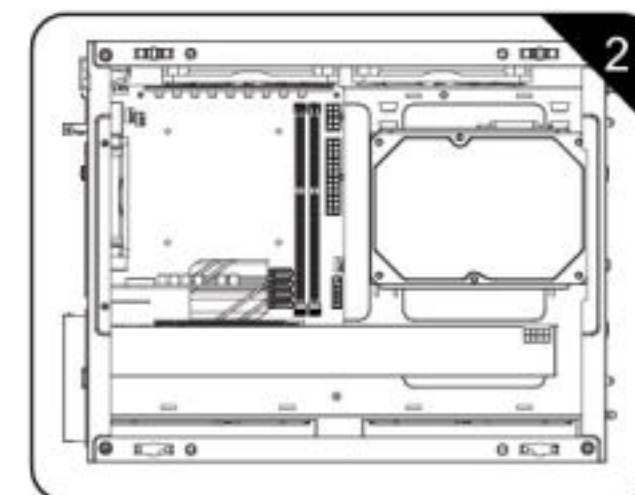


Fix with screws from back of MB tray

Max. CPU Cooler Height

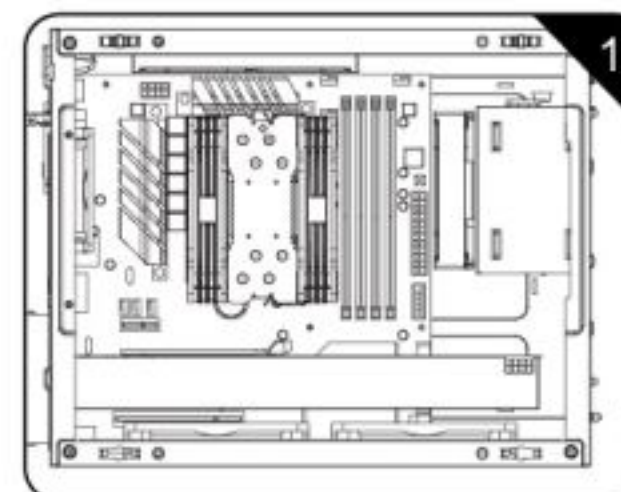


When GPU installed horizontally
and without left side bracket: 155mm

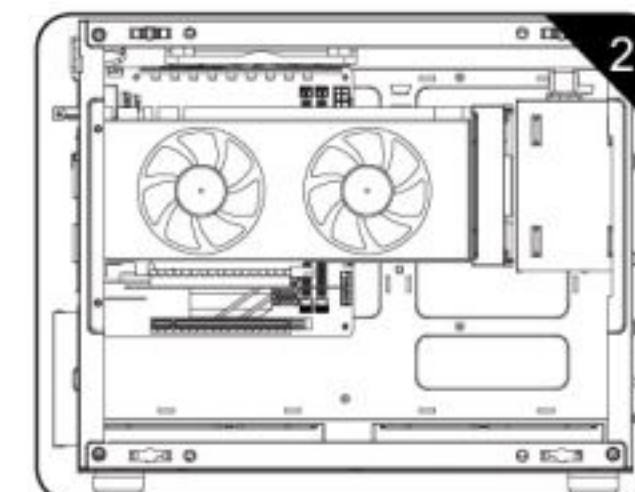


When GPU installed vertically: 88mm


Installation of Graphic Card

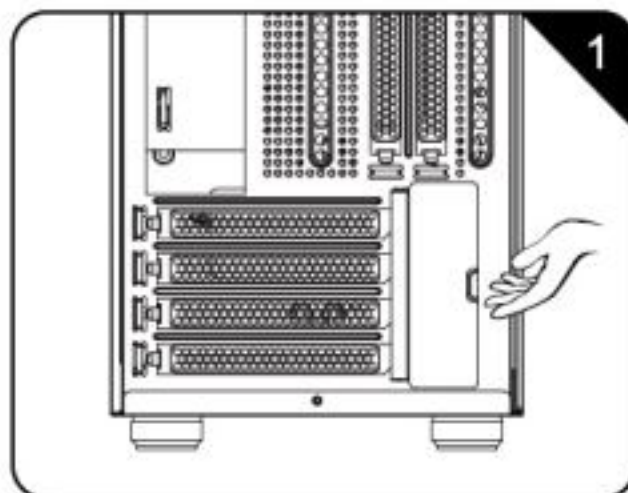


Lift PCI magnetic bay

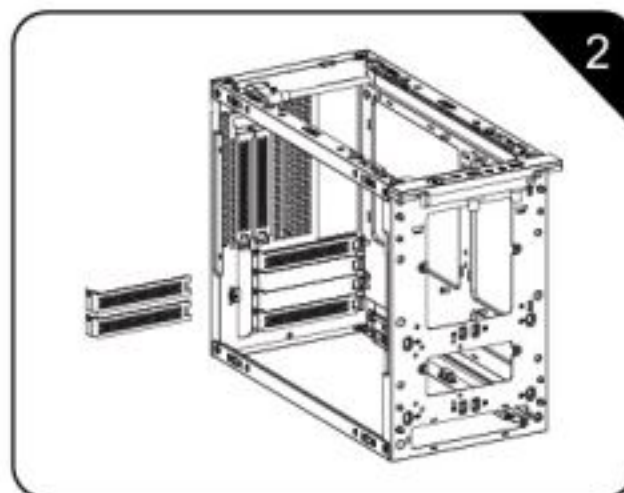

Unscrew and remove PCI bay

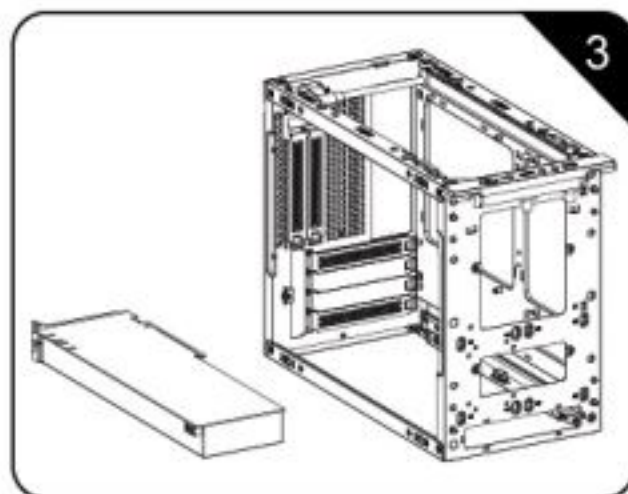


Insert GPU and fix with screw

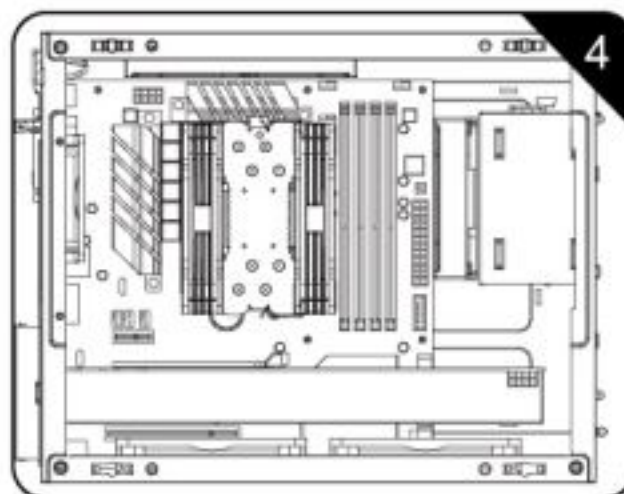


Finish


Length Limitation of Vertical GPU Installation

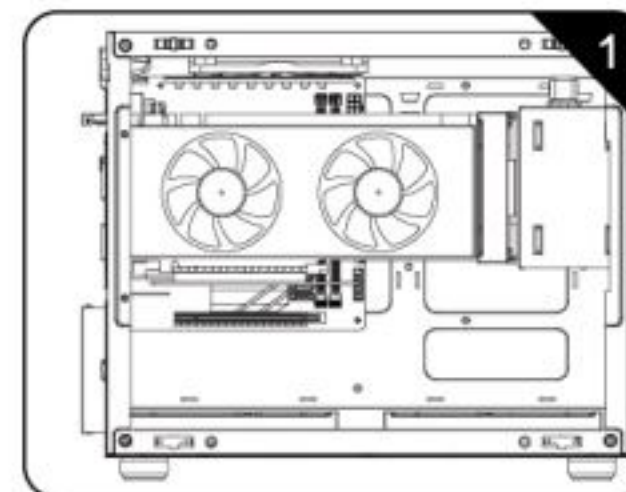

With Micro PSU, 245mm
(When PSU fixed to front plate)

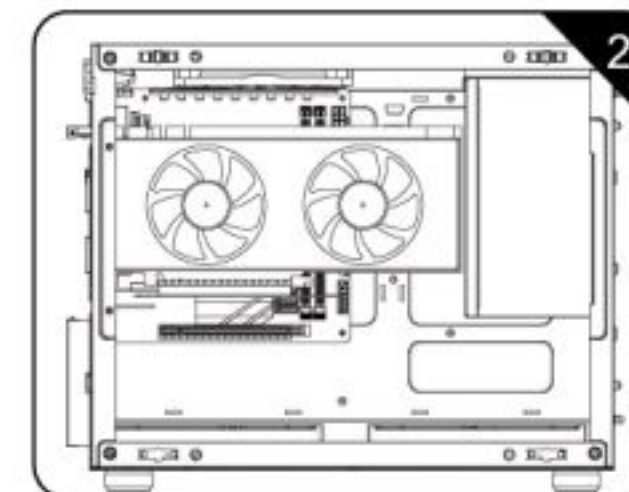


With ATX PSU, 245mm

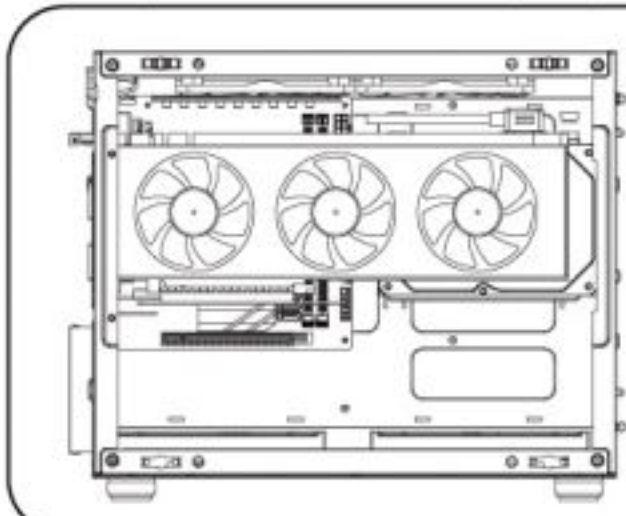


ITX Motherboard Installation
Plan - Max GPU Length
With Micro PSU, 335mm
(When Micro PSU fixed to MB Tray)

Installation of Vertical GPU

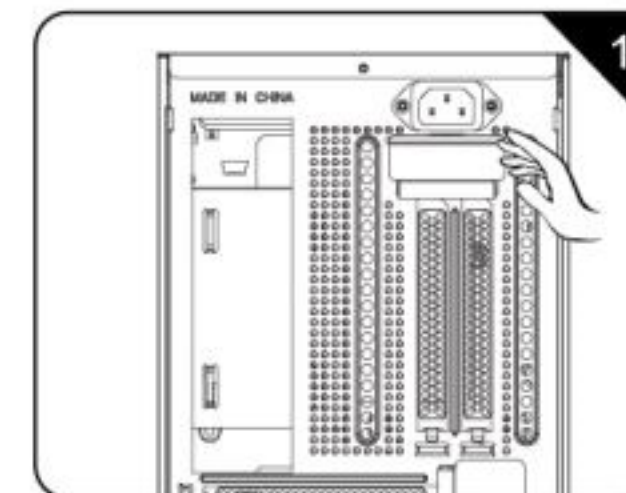


Lift PCI Magnetic bay, unscrew
to remove PCI bay

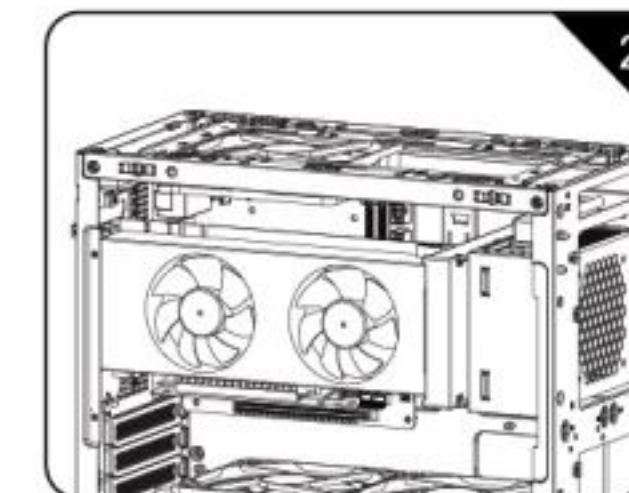


Insert GPU and fix with screws,
then connect with cable


Installation of HDD on HDD / Fan Bracket

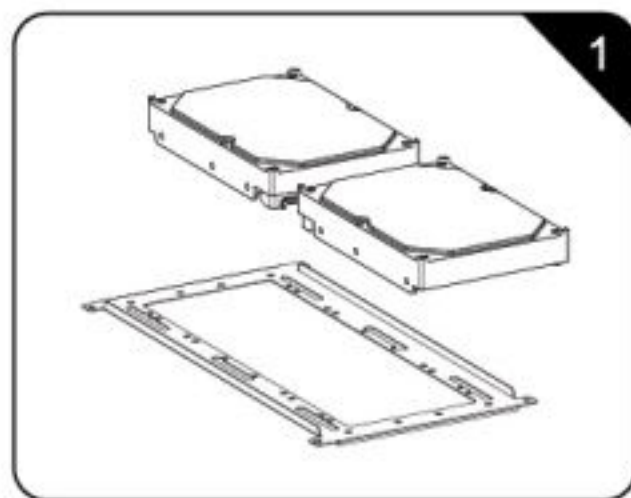


Get SSD/HDD and the bracket ready

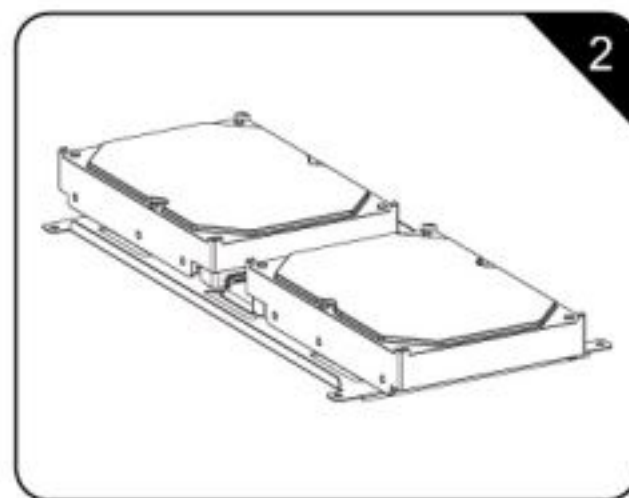

Put the SSD/HDD to the bracket on the side with lifted edge

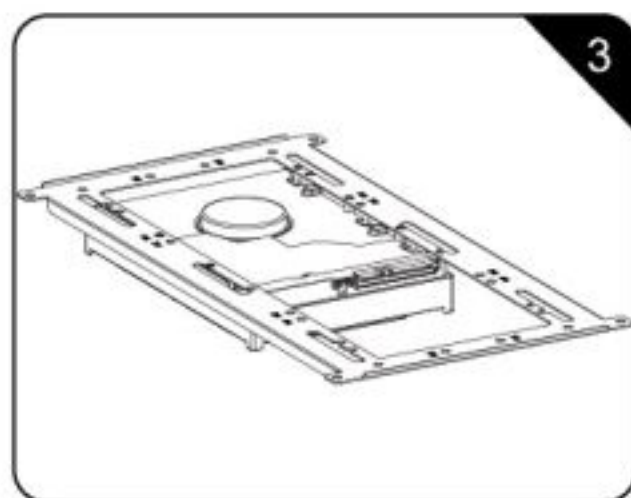


Fix with screws
(HDD screws for HDD)
(MB screws for SSD)

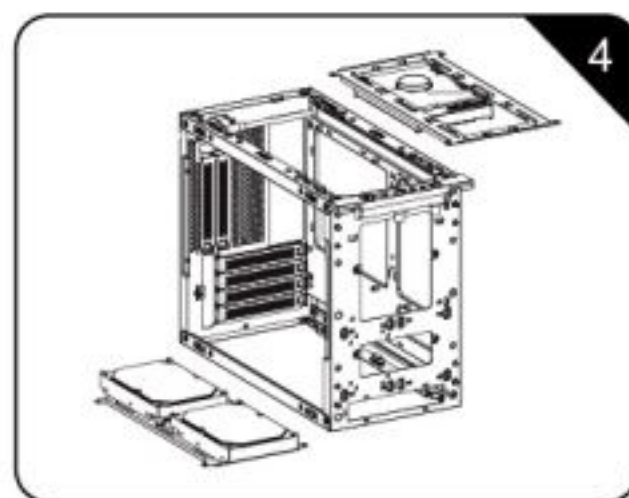


Fix it back to the top/bottom of chassis
(Only support HDD*1 on top when with ATX PSU)


Installation of HDD / SSD on left fan Bracket

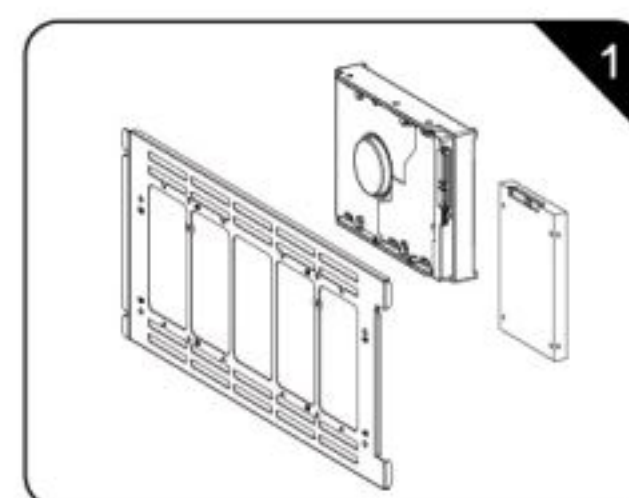


Get SSD/HDD and the bracket ready

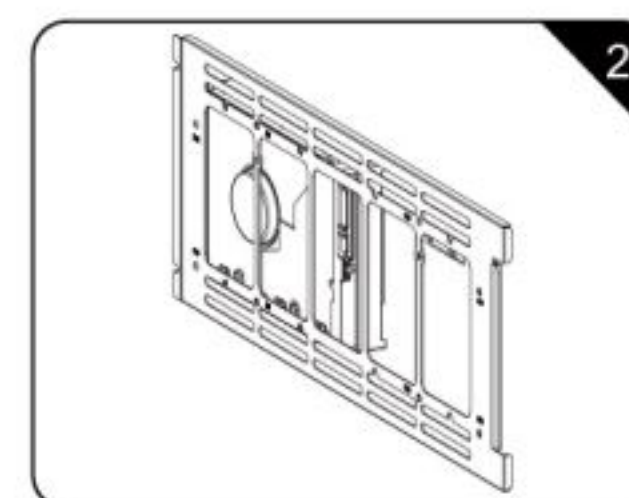

Put the SSD/HDD to the bracket on the side with lifted edge

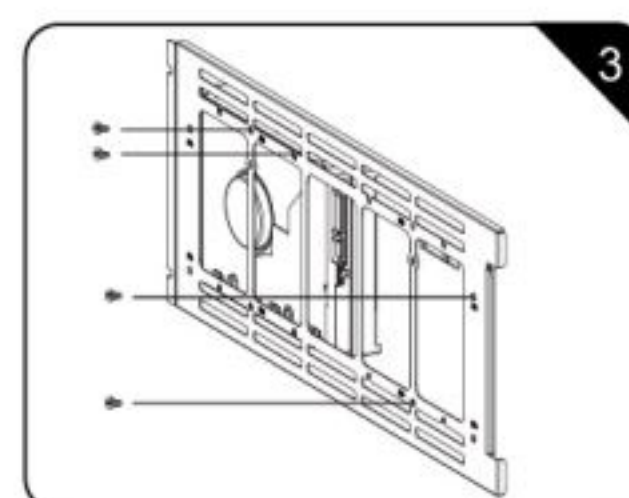


Fix with screws
(HDD screws for HDD)
(MB screws for SSD)

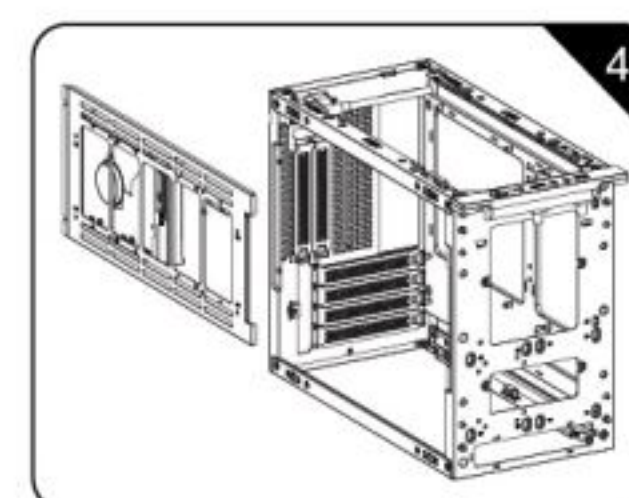


Fix it back to the side of chassis
(Only support HDD*1 on top when with ATX PSU)

Installation of Double SSD inside of Front Plate

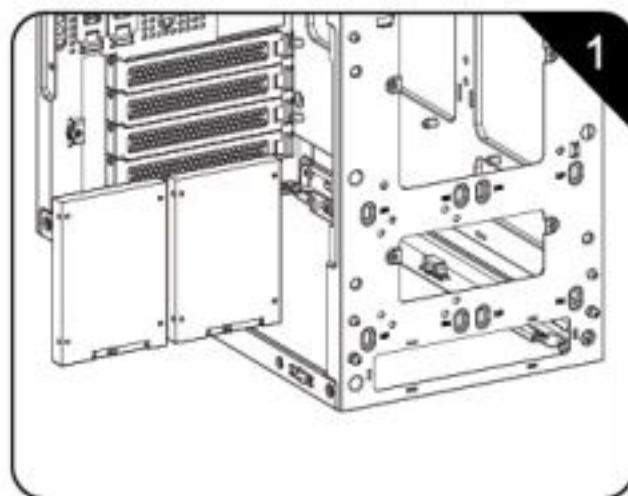


Put the SSD to the location as screws holes indicate

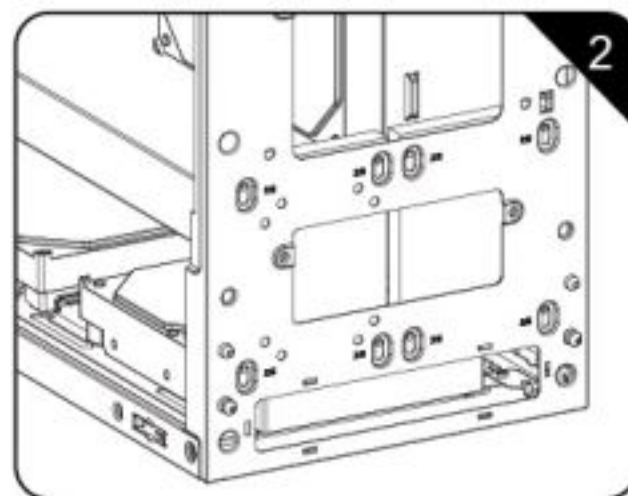


Use M/B screws to fix

Installation of Water Cooler on HDD / Fan Bracket (Supports only at the bottom)

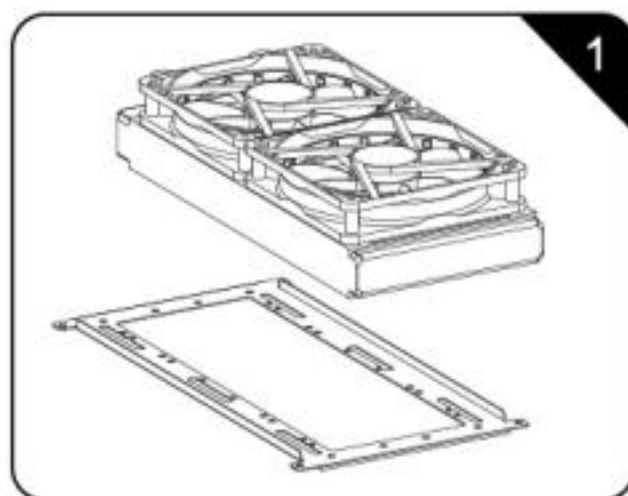


Fix 240/120 water cooler to the bracket as shown on the picture

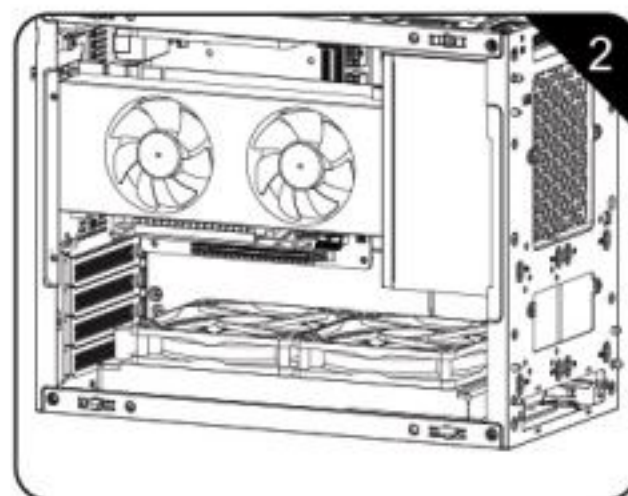


Fix bracket back into the bottom of chassis (Only supports water cooler installation on the bottom plate with vertical GPU and ITX mother board)

Installation of Rear Plate Fans

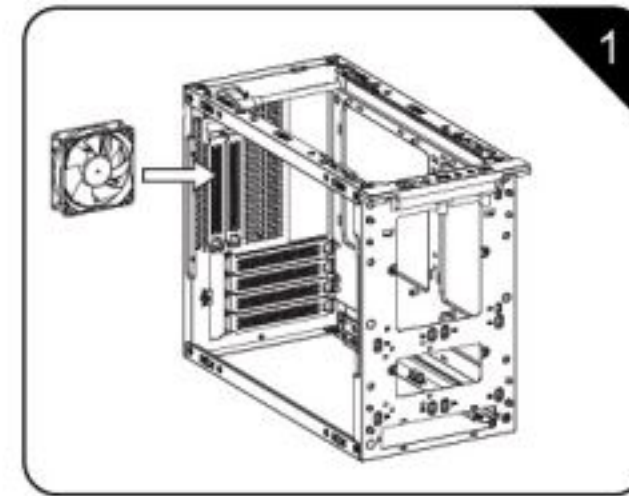


Fix 8cm fan
(Air outflow)

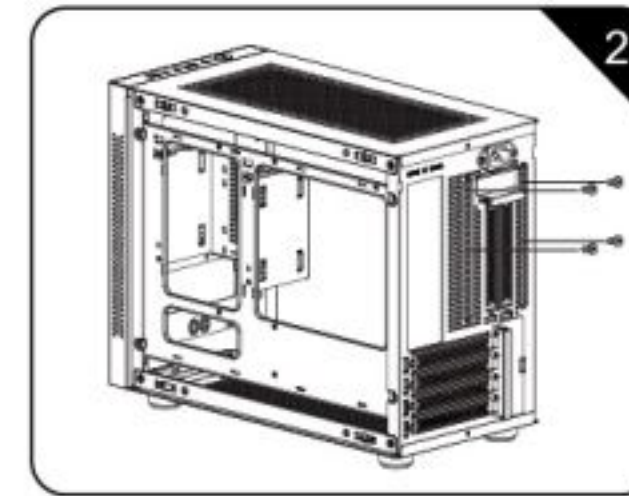


Fix screws from rear plate

Installation of Fans on HDD / Fan Bracket (Top) (Supports 2*12cm fan with Micro PSU, Support 1*12cm fan with ATX PSU)

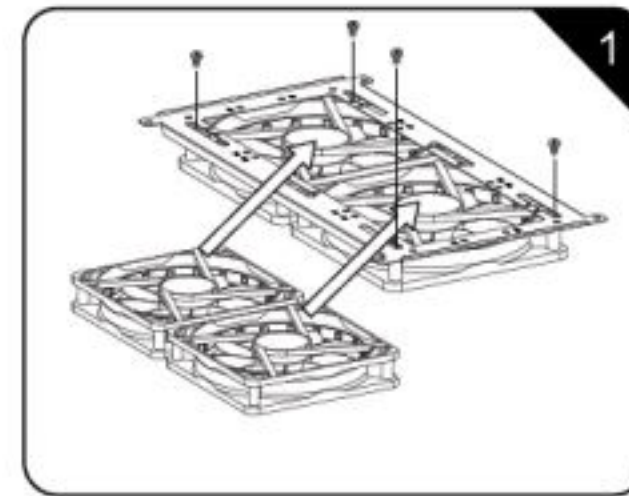


Fix 12cm fan to the bracket

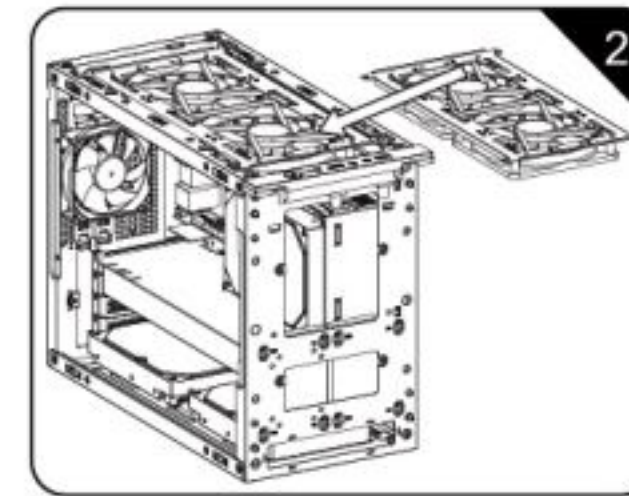


Fix Bracket back to the chassis

Installation of fans on HDD / Fan Bracket (Bottom)

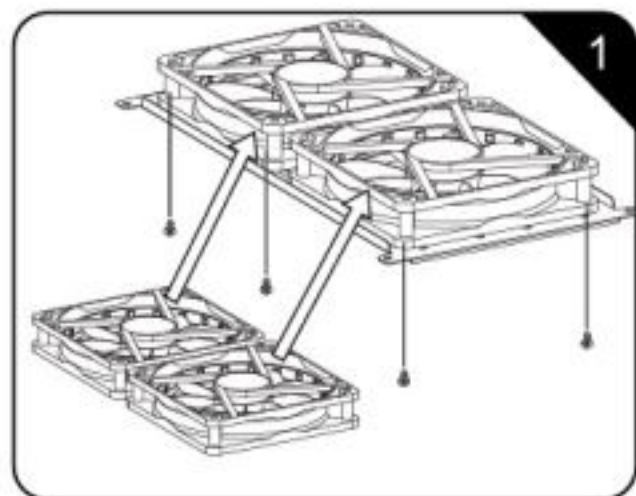


Fix 12cm fans to the bracket
(Air inflow from the bottom)

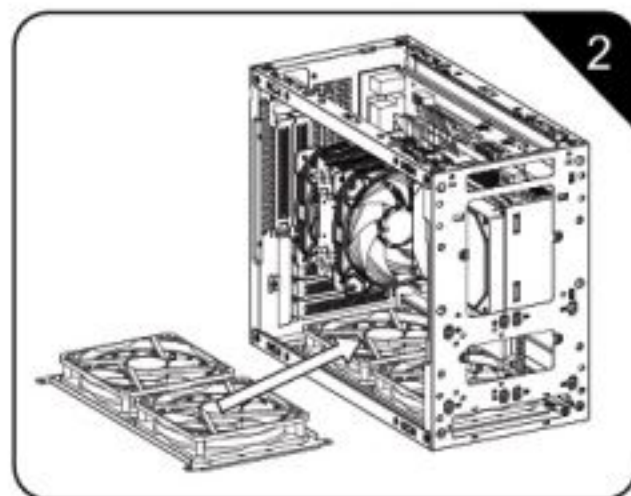


Fix the bracket back into the chassis

Installation of Fans on HDD / Fan Bracket (Left Side)

(Supports 1*12cm fans when using ATX PSU; doesn't support HDD when fans are installed)

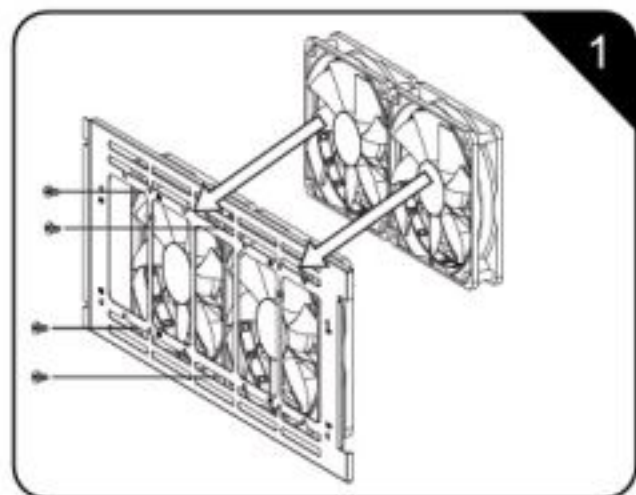

Fix 12cm fans to the bracket
(Air inflow from the left side)

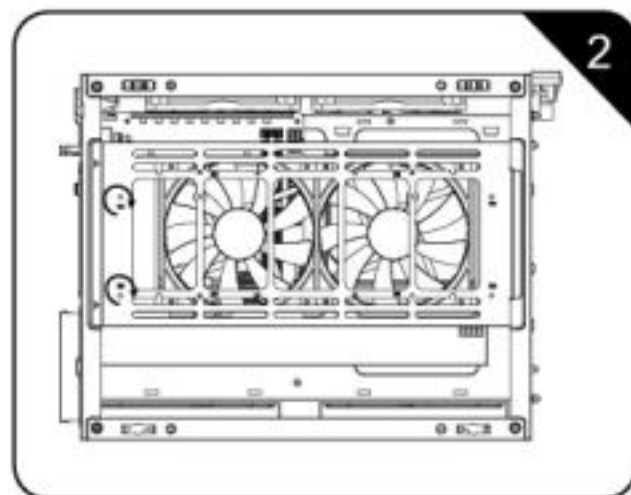

Fix the bracket back into the chassis